

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2003 (02.10.2003)

PCT


22 SEP 2004
508,771

(10) International Publication Number
WO 03/081849 A1

- (51) International Patent Classification⁷: **H04L 12/44**, 12/56, 29/14
- (21) International Application Number: **PCT/EP02/12277**
- (22) International Filing Date:
1 November 2002 (01.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0206732.0 22 March 2002 (22.03.2002) GB
- (71) Applicant (for all designated States except US): **MOTOROLA INC** [US/US]; 1303 E. Algonquin Road, Schaumburg, IL 60196 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **RAUSCH, Mathias** [DE/DE]; Motorola GmbH, Halbeiter, 81829 Muenchen (DE). **TEMPLE, Christopher** [DE/DE]; Motorola GmbH, Halbeiter, 81829 Muenchen (DE).
- (54) Agent: **LITCHFIELD, Laura**; Motorola European Intellectual, Property Operations, Midpoint, Alencon Link, Basingstoke, Hampshire RG21 7PL (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(57) Abstract: SELF-ROUTING, STAFF-COUPLER-BASED COMMUNICATION NETWORK

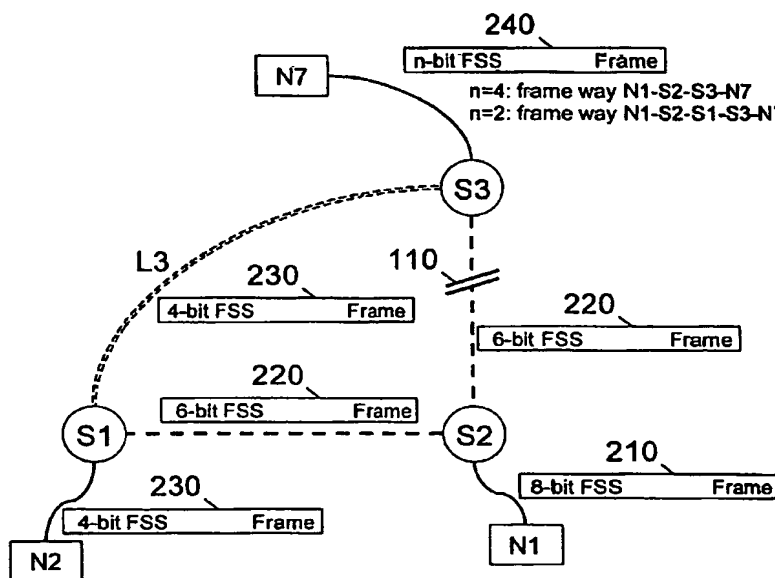

(57) Abstract: A self-routing communication network (100) having: a plurality of nodes (N1-N15); a plurality of star couplers (S1-S4) each having a plurality of inputs and a plurality of outputs; and communication paths coupled between the plurality of star couplers and the plurality of nodes for communication therebetween of frames of information, including at least one redundant communication path (L1-L3), and each of the star couplers sensing which of its inputs first receives a frame and passing only the frame first received. The frames each have a fram-start-sequence (FSS), and the star couplers change the fram-start-sequences before outputting the frame of information e.g. by reducing the size of a frame's fram-start-sequence by a predetermined amount (e.g., 2 bits), whereby interconnection failure may be diagnosed by analysing the frame-start-sequence.

BEST AVAILABLE COPY

WO 03/081849 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

SELF-ROUTING, STAR-COUPLER-BASED COMMUNICATION NETWORK**Field of the Invention**

This invention relates to communication networks and particularly to communication in real-time systems.

Background of the Invention

In the field of this invention it is known that fault-tolerance is a ubiquitous requirement in order to cope with communication errors in such systems.

It is known to provide redundant communication channels, which may be used in the event of failure of a primary communication channel. However, due to technical/economical constraints (increased cost incurred by redundant cabling and additional node interfaces) the number of channels is limited to two in known systems such as the established 'Time-Triggered Protocol' (TTP) and the more-recently proposed 'FlexRay' fault-tolerant real-time automotive communication systems.

It is also known to use intelligent network routers, which can intelligently re-route data transfer in the event of failure in a network link. However, equipping network star couplers (e.g., in systems such as wide/local area networks WAN/LAN) with microprocessors increases the overall system cost significantly. In

- 2 -

addition such routers introduce a time delay, which may cause problems in distributed safety-critical applications.

Hence, in summary, prior art solutions have the disadvantages of high costs and/or of additional time delays in the communication path.

A need therefore exists for self routing highly available network architecture based on star couplers wherein the abovementioned disadvantage(s) may be alleviated.

Statement of Invention

In accordance with a first aspect of the present invention there is provided a self-routing network as claimed in claim 1.

In accordance with a second aspect of the present invention there is provided a star coupler as claimed in claim 9.

Brief Description of the Drawings

One self-routing, highly-available network architecture based on star couplers incorporating the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

- 3 -

FIG. 1 shows a block-schematic diagram of the network, illustrating links between star couplers and nodes of the network;

FIG. 2 shows a block-schematic diagram illustrating frame transfer between some of the star couplers and nodes of the network;

FIG. 3 shows a block-schematic diagram of a star coupler which may be used in the network of FIG. 1 and FIG. 2; and

FIG. 4 shows a timing diagram of the frame transfer illustrated in FIG. 2.

Description of Preferred Embodiments

Referring firstly to FIG. 1, a self-routing, highly-available, real-time network communication system 100 includes a set of spatially distributed nodes (N1-N15) that is interconnected by a star-based network (comprising star couplers S1-S4 whose interconnection is depicted by single-dash lines) channel providing a single route between any two of the nodes. The nodes communicate by exchanging frames, each of which contains a frame-start-sequence (FSS). As so far described, the system may be, for example, a 'FlexRay' communication system, and need not be described in further detail.

- 4 -

However, in distinction to a known 'FlexRay' communication system, the system 100 adds additional links L1, L2 and L3 (depicted by double-dash lines) between, respectively, the star couplers S3 and S4, the star couplers S1 and S4, and the star couplers S1 and S3. These additional connections between the star couplers prevent partitioning of the network in the event of connection failures among star couplers by providing an alternative communication path. In the configuration shown in FIG. 1, the system 100 can withstand two such connection failures without loss of communication among the nodes. For the purpose of illustration an interruption 110 is marked in FIG. 1 between the star couplers S2 and S3.

As will be discussed in more detail below, the star couplers resolve frame collisions by choosing exactly one input (the first detected input frame) and routing it to the remaining outputs. Each of the star couplers performs this function by continuously scanning its input lines in search of a frame-start-sequence, in a similar manner to that in a known 'FlexRay' system. In a given network the shortest (in the sense of the fastest) connection between star couplers will be found automatically.

Reference is now also made to FIG. 2, which shows a portion of the system of FIG. 1, made up of the nodes N1, N2 & N7, the star couplers S1, S2 & S3, and the links therebetween (including the interruption 110). FIG. 2 illustrates three cases:

- 5 -

- Case 1 - A single input frame arrives (from the node N1) at the star coupler S2 on one of its inputs (e.g., on input 2), causing this input to be selected and causing the star coupler to output this frame on all others of its outputs.
- Case 2 - Three input frames arrive at the star coupler S1 (e.g., on inputs 2, 3 and 4). In this case, of these inputs the input from the star coupler S2 (say, input 4) is selected, as it is the first to arrive.
- Case 3 - At the star coupler S3, the input (e.g., input 1) from the star coupler S1 via the additional link L3 is selected, as it is the first input to be detected (i.e., scanned) by the star coupler.

Diagnosis (i.e., fault detection) is a vital issue for providing real-time availability. In the system of FIG. 1 and FIG. 2, fault detection is achieved as follows. A star coupler (S1, S2, S3 or S4) shortens the frame for output (compared with a selected input frame) by removing or consuming bits from the frame-start-sequence within the star coupler. By analysing a received frame, a receiver node can detect the route taken by the received frame. Shortening the frame-start-sequence may be realized either by (a) internal time base/clock (for timing the occurrence of the predetermined amount of the frame-start-sequence), or (b) bit detection (for detecting the occurrence of the predetermined amount of the frame-start-sequence).

- 6 -

FIG. 3 shows a star coupler (such as the star coupler S1, S2, S3 or S4) 300, which has inputs (four of which are shown), outputs (four of which are shown), an input detector 310, a FSS shortener 320, and an output enabler 330. The input detector 310 (whose detailed structure will be apparent to a person of ordinary skill in the art, and need not be described further) detects which of the inputs is receiving, or is the first to receive a frame-start-sequence, and selects this input. The selected input is applied to the FSS shortener 320 (as mentioned above, either an internal time base/clock or a bit detector - whose detailed structure will be apparent to a person of ordinary skill in the art, and need not be described further) which removes 2 bits (as will be described below) of the frame-start-sequence. The shortened FSS and the following frame data are applied to the output enabler 330, which applies the shortened FSS frame to all outputs other than that which was selected by the input detector 310.

An example of the fault detection procedure referred to above is shown in FIG. 2 (and also in FIG. 4, which will be referred to in more detail below), in which each star coupler removes 2 bits from the frame-start-sequence of a frame which traverses the star coupler.

In the example illustrated, node N1 transmits a frame with an 8-bit frame start sequence 210. From the 8-bit FSS frame 210, the star coupler S2 outputs a 6-bit FSS frame 220. From the 6-bit FSS frame 220, the star coupler

- 7 -

S1 outputs a 4-bit FSS frame 230. Since the path between the star couplers S2 and S3 is interrupted, node N7 receives a frame 240 (which, from node 1, has traversed star couplers S2, S1 and S3) with a remaining 2-bit frame-start-sequence as the frame had to pass three star couplers. In comparison, in the fault-free case if there were no interruption between the star couplers S2 and S3, the frame 240 received at node 7 (which, from node 1, would have traversed star couplers S2 and S3) would have a 4-bit frame-start-sequence. Thus, by determining the number of FSS bits in the received frame originating from the node N1, the node N7 can determine whether the frame travelled via the path N1-S2-S3-N7 (4-bit FSS) or the frame travelled via the path N1-S2-S1-S3-N7 (2-bit FSS).

Referring now also to FIG. 4, the behaviours of the star couplers S2, S1 and S3 are illustrated respectively for the three cases 1, 2 & 3 referred to above.

Thus, it can be seen that in case 1 (at the star coupler S2) 'Frame 1' arrives (from the node N1) at the input 2 of the star coupler. After a maximum signal detection time T_{in} , the input 'Frame 1' is selected, and no further input signal is then accepted. After a subsequent maximum time T_{out} to power up the outputs, the 'Frame 1' (now with 2-bits removed from its FSS) is output at each of the other outputs (outputs 1, 3 and 4) of the star coupler.

In case 2 (at the star coupler S1) 'Frame 2' (from the star coupler node N1 via the star coupler S2) arrives at

- 8 -

the input 4 of the star coupler, 'Frame 3' arrives at the input 3 of the star coupler, and 'Frame 4' arrives at the input 2 of the star coupler. After a maximum signal detection time T_{in} , the input 'Frame 2' is selected, since it the first to arrive, and no further input signal is then accepted. After a subsequent maximum time T_{out} to power up the outputs, the 'Frame 2' (now with a further 2-bits removed from its FSS) is output at each of the other outputs (outputs 1, 2 and 3) of the star coupler.

In case 3 (at the star coupler S3) 'Frame 5' (from the star coupler node N1 via the star coupler S2 and the star coupler S1) arrives at the input 1 of the star coupler, and 'Frame 6' arrives at the input 4 of the star coupler. After a maximum signal detection time T_{in} , the input 'Frame 5' is selected, since it the first to be detected, and no further input signal is then accepted. After a subsequent maximum time T_{out} to power up the outputs, the 'Frame 5' (now with a further 2-bits removed from its FSS) is output at each of the other outputs (outputs 2, 3 and 4) of the star coupler.

It will be understood that the self-routing, highly-available network architecture based on star couplers described above provides the following advantages:

- improves the availability of the network by providing additional, alternative communication paths (L1, L2, L3)

- 9 -

- enables error detection by detecting if the header length (FSS) is shorter than for shortest path communication,
- automatic activation of alternative paths based on physical principle of propagation delay (since, if the alternative paths such as L1, L2, L3 are not needed, frames transferred via these redundant paths will not progress further because their longer propagation delay will prevent their frames being selected by further star couplers)
- no need for intelligent functions in the star couplers other than selecting the first message and cutting a defined number of FSS bits of the frame.

It will also be understood that variations of the above-described network will be apparent to a person of ordinary skill in the art without departing from the invention.

For example, although the star couplers are described as shortening the frame-start-sequence by 2 bits, the network may be implemented with star couplers which change the frame-start-sequence in any desired manner such that an interconnection failure may be diagnosed by analysing the frame-start-sequence. For example, the frame-start-sequence could be a special frequency (e.g. 50 MHz sine wave) or symbol to activate the input and the star coupler could change this frequency to 40 MHz at its output or would send a different symbol. The next star coupler could change the FSS from 40 to 30 MHz and so on, or would change the symbol again.

- 10 -

Also, for example, although the network has been described in the context of a 'FlexRay' communication system, the network may be implemented in any system employing a deterministic media access scheme such as TDMA (time division multiple access).

- 11 -

Claims

1. A self-routing communication network, comprising:
a plurality of nodes;
a plurality of star couplers each having a plurality of inputs and a plurality of outputs; and
communication paths coupled between the plurality of star couplers and the plurality of nodes for communication therebetween of frames of information, wherein
the communication paths include at least one alternative communication path, and
the star couplers each include means for sensing which of its inputs first receives a frame of information and for passing only the frame of information first received.
2. The self-routing communication network of claim 1, wherein the frames of information each have a frame-start-sequence, and the star couplers further each include means for changing the frame-start-sequence before outputting the frame such that an interconnection failure may be diagnosed by analysing the frame-start-sequence.
3. The self-routing communication network of claim 2, wherein the means for changing the frame-start-sequence comprises means for reducing the size of the frame-start-sequence by a predetermined amount.

- 12 -

4. The self-routing communication network of claim 3, wherein the predetermined amount comprises 2 bits.

5. The self-routing communication network of claim 3 or 4, wherein the means for reducing the size of the frame-start-sequence comprise clock means for timing the occurrence of the predetermined amount of the frame-start-sequence.

6. The self-routing communication network of claim 3 or 4, wherein the means for reducing the size of the frame-start-sequence comprise bit detection means for detecting the occurrence of the predetermined amount of the frame-start-sequence.

7. The self-routing communication network of any preceding claim, wherein the network is based on a deterministic media access scheme.

8. The self-routing communication network of any preceding claim, wherein the network is arranged for real-time communication.

- 13 -

9. A star coupler for use in a self-routing communication network having a plurality of nodes coupled via communication paths and a plurality of star couplers for communication between the nodes of frames of information,

the star coupler having a plurality of inputs and a plurality of outputs,

wherein

the star coupler includes means for sensing which of its inputs first receives a frame of information and for passing only the frame of information first received, and the frames of information each have a frame-start-sequence, and the star coupler further includes means for changing the frame-start-sequence in a predetermined manner before outputting the frame of information, whereby interconnection failure in the network may be diagnosed by analysing from the frame-start-sequence.

10. The star coupler of claim 9, wherein the means for changing the frame-start-sequence in a predetermined manner comprises means for reducing the size of the frame-start-sequence by a predetermined amount.

11. The star coupler of claim 10, wherein the predetermined amount comprises 2 bits.

12. The star coupler of claim 10 or 11, wherein the means for reducing the size of the frame-start-sequence comprise clock means for timing the occurrence of the predetermined amount of the frame-start-sequence.

- 14 -

13. The star coupler of claim 10 or 11, wherein the means for reducing the size of the frame-start-sequence comprise bit detection means for detecting the occurrence of the predetermined amount of the frame-start-sequence.

14. The star coupler of any one of claims 9-13, wherein the network is based on a deterministic media access scheme.

15. The star coupler of any one of claims 9-14, wherein the network is arranged for real-time communication.

1/4

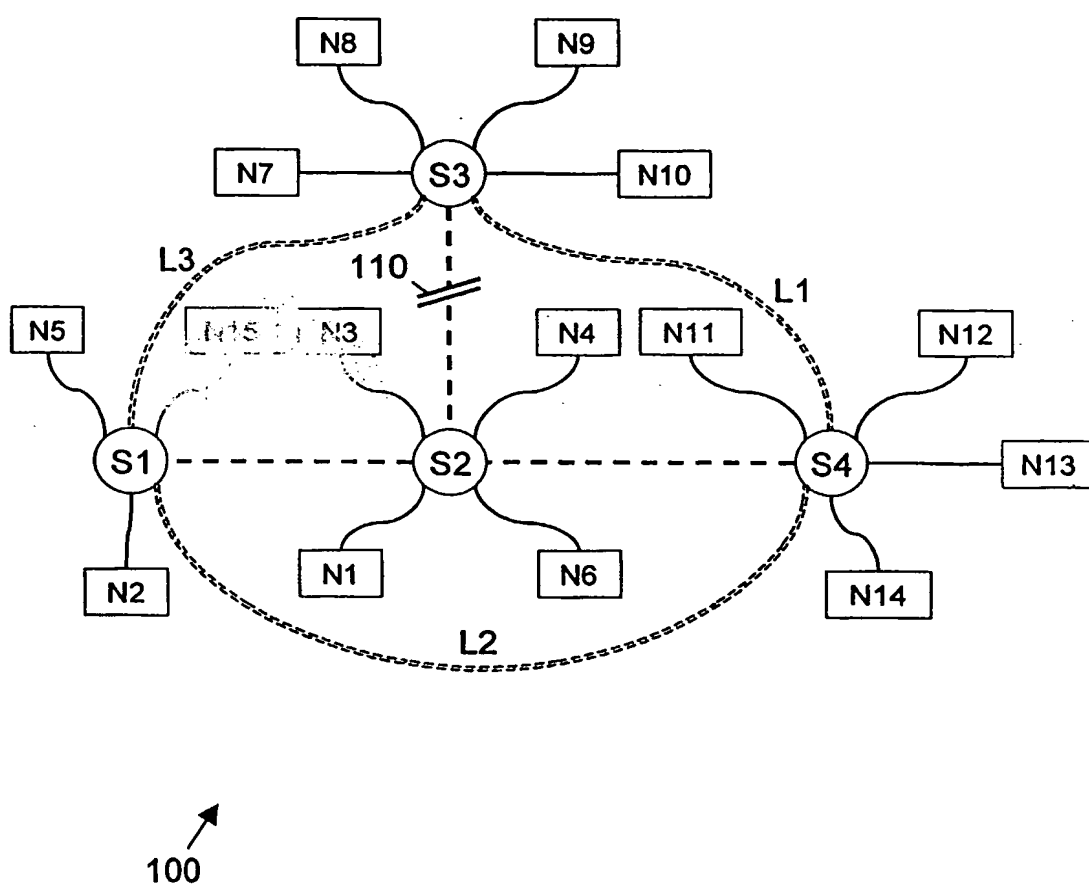


FIG. 1

2/4

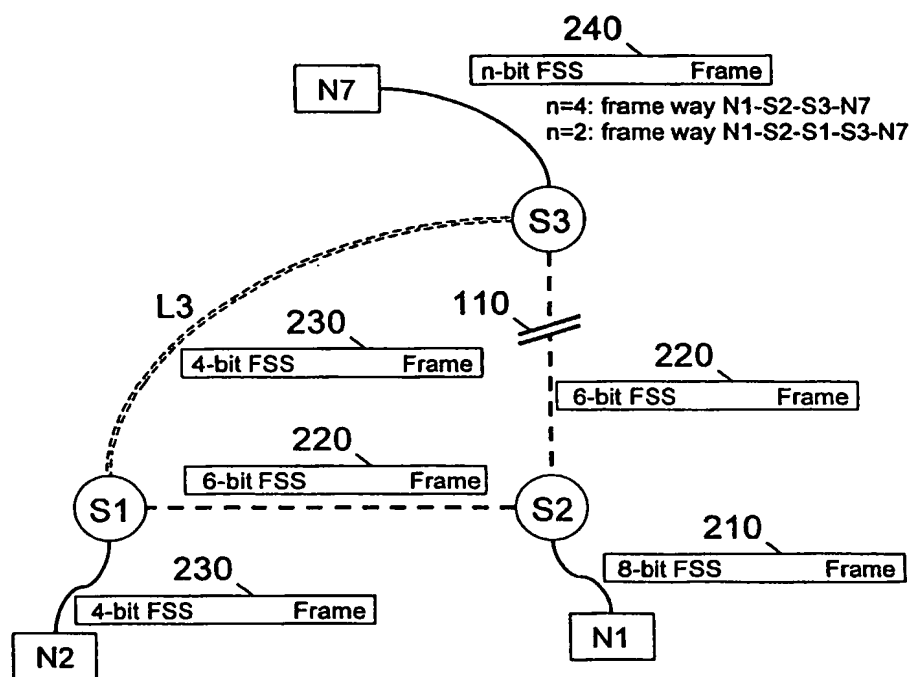


FIG. 2

3/4

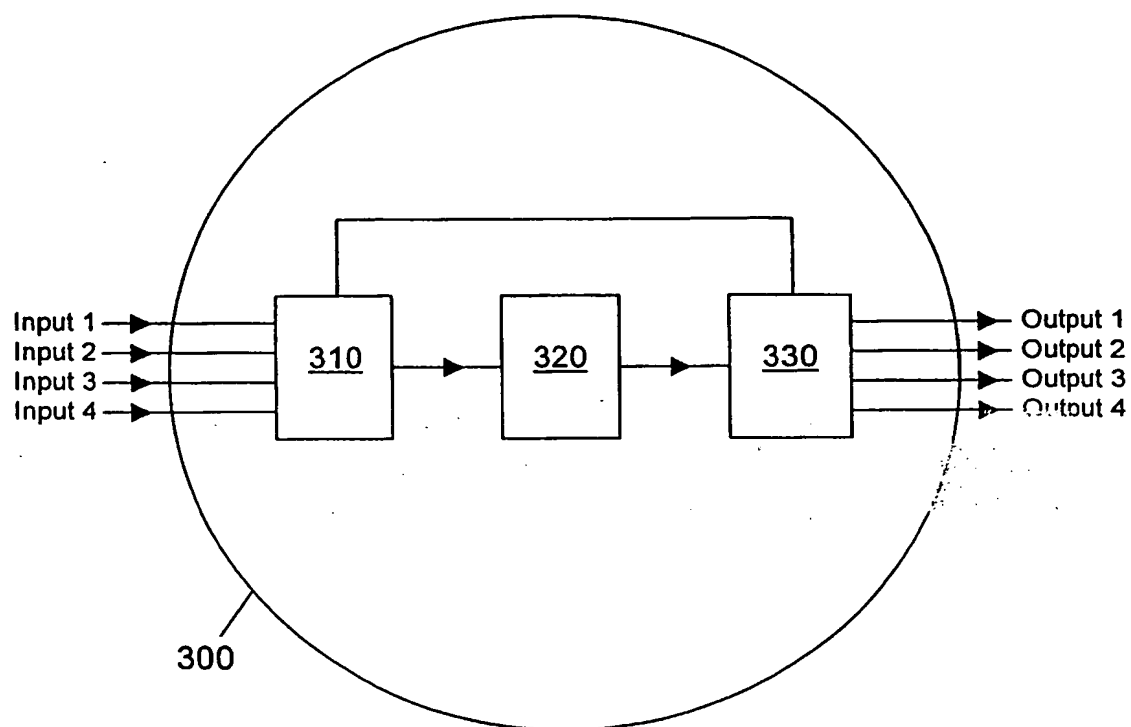


FIG. 3

4 / 4

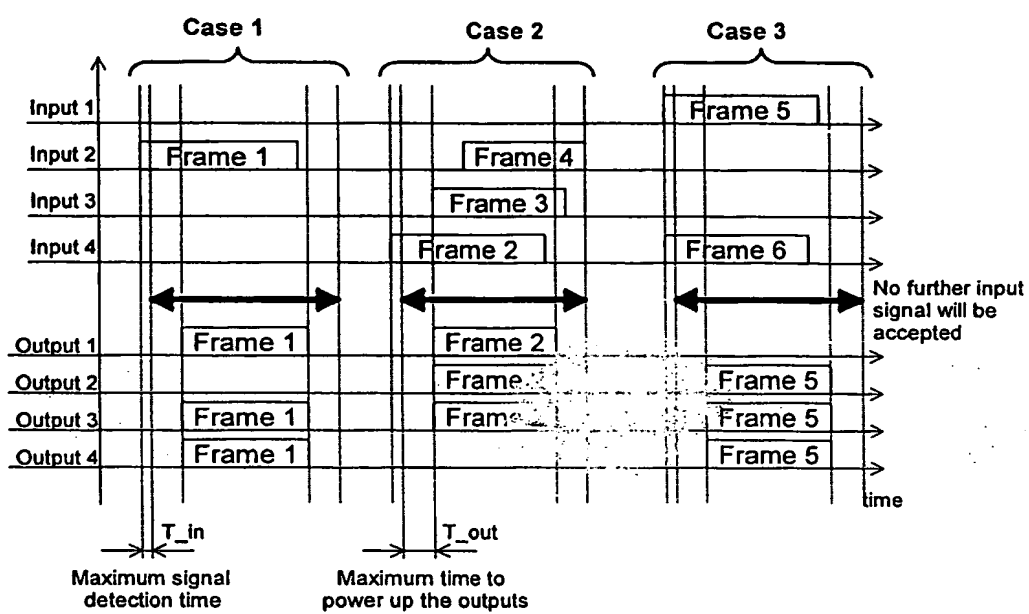


FIG. 4

INTERNATIONAL SEARCH REPORT

 In tional Application No
 PCT 02/12277

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04L12/44 H04L12/56 H04L29/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 701 756 A (BURR WILLIAM E) 20 October 1987 (1987-10-20) column 5, line 46 - line 52 column 5, line 64 - line 67 column 6, line 19 - line 26 column 8, line 46 - line 65 figures 5-8	1,2,7-9, 14,15
A	US 5 341 212 A (WOLFGANG) 23 August 1994 (1994-08-23) abstract --- -/-	1-15



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

13 March 2003

Date of mailing of the international search report

24/03/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Tous Fajardo, J

INTERNATIONAL SEARCH REPORT

Int lional Application No

PL 1 02/12277

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LYNN M ET AL: "HYBRID OPTICAL NETWORK ARCHITECTURES FOR AUTOMOTIVE APPLICATIONS" AUTOMOTIVE ENGINEERING INTERNATIONAL, SAE INTERNATIONAL, US, vol. 107, no. 9, September 1999 (1999-09), pages 18-24, XP000860905 ISSN: 0098-2571 the whole document ---	1-15
A	BELSCHNER R ET AL: "Anforderungen an ein zukünftiges Bussystem für fehlertolerante Anwendungen aus Sicht Kfz-Hersteller" VDI CONGRESS 2000, 14 September 2000 (2000-09-14), pages 1-19, XP002201780 page 3, line 20 - line 24 page 11, line 23 - line 25 figure 7 ---	1-15
A	PELLER M ET AL: "byteflight specification Version 0.5 Draft" BMW SPECIFICATION DRAFT, 29 October 1999 (1999-10-29), XP002201782 Retrieved from the Internet: <URL:http://www.byteflight.com/specification/default.htm> 'retrieved on 2002-06-07! page 8, line 1-4 page 10, line 27 -page 11, line 4 figures 4-3,4-4 -----	1-15

INTERNATIONAL SEARCH REPORT

ational Application No

PCT/ 02/12277

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4701756	A	20-10-1987	NONE	
US 5341232	A	23-08-1994	WO 9009710 A1 DE 58908572 D1 EP 0458782 A1	23-08-1990 01-12-1994 04-12-1991

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.